




P520i

SECURITY

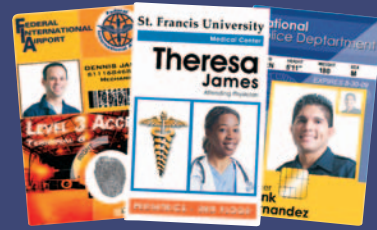

Rugged, Reliable Card Printing for High Security Applications

For highly secure, laminated photo ID cards, Zebra's P520i is ideal. This robust, dual-sided card printer quickly and easily produces high quality laminated photo ID cards for large volume applications. Its laminating feature adds security, while considerably extending card life and durability.

Use the P520i card printer for:

- » Military ID Cards
- » Secure Facility Access Control
- » Correctional Facility ID Cards
- » Transit Passes

Zebra P520i Advantages

Security: Single or dual-sided hologram lamination, password protection capability

Advanced Color Printing: Enhanced color-processing firmware and new richer color formulation

i Series Intelligent Printing System: Enhanced i Series functionality makes high image quality card printing a simple function for all users. The system features:


- » Advanced RFID Technology
- » Automatic Driver Configuration
- » Intelligent Color Optimization
- » Ribbon Image Counter & Ribbon Low Notification
- » Enhanced Ribbon Formulation

Basic Specifications:

- » Under 36 Seconds/Card Print & Laminate Speed
- » Full Color Dual-Sided Card Printing with Lamination
- » USB with Parallel or USB with Built-in Ethernet
- » 100 Card Capacity Feeder
- » i Series Printers require the use of TrueColours™ i Series ribbons for full color printing

P520i Card Printer

*i*series



**Card
Printer
Solutions**

P520i

Card Printer Product Specifications



General Specifications

- » High speed printing with built in laminator
- » 100 cards/hour, color front, black back 1.0 mil laminate
- » 4MB image memory standard
- » Windows drivers for 98, NT, 2000, ME, XP
- » One year printer warranty
- » One year (unlimited passes) printhead warranty*

Color Printing

- » Color dye sublimation or monochrome thermal transfer printing
- » Under 36 seconds/card, color front, black back 1.0 mil laminate
- » 300 dpi (12 dots/mm) print resolution
- » Enhanced fourth generation laminator with auto laminate synchronization

Bar Codes

- » Code 39, Code 128 B & C with & without check digit
- » 2 of 5 & 2 of 5 Interleaved
- » UPC-A, EAN 8 & EAN 13
- » PDF-417 2D bar code and other symbologies available via Windows drivers

Fonts

- » True Type fonts via Windows driver

Card Specifications

- » Types: PVC, composite PVC (use composite cards when laminating)
- » Card width/length: ISO CR-80-ISO 7810, 2.12" (54mm) x 3.38" (86mm)
- » Magnetic Stripe-ISO 7811
- » Smart Card-ISO 7816-2
- » Card thickness: 30 mil (.76mm) to 50 mil (1.27mm)
- » Card feeder capacity: 100 cards (30 mil)
- » Card output hopper capacity: 100 cards (30 mil)

Electrical

- » 110 ~ 240 Volts AC, 50 ~ 60 Hz (auto switching)
- » FCC Class A, CE, UL and CUL approved

Communications Interface

- » USB with Centronics Parallel
- » Built-in Ethernet Option

Ribbon Specifications ¹

- » *i* Series Printers require the use of *i* Series ribbons for full color printing
- » Monochrome: 1000 & 1500 cards/roll (black, red, blue, green, yellow, silver, gold, scratch off gray and white)
- » YMCK/K: 200 cards/roll
- » YMCK: 250 & 400 cards/roll
- » YMC: 500 cards/roll
- » K DyeSub + O: 500 cards/roll
- » K Resin + O: 500 cards/roll



Note 1: For optimum printer performance use Genuine Zebra Supplies.

Lamination Specifications ²

- » Laminate for full coverage, magnetic stripe cards, and smart cards
- » Clear and holographic options available
 - » **1.0 mil** laminate capacity: 100 cards per roll
 - » **0.6 mil** laminate capacity: 170 cards per roll
- » Clear laminate for dual-sided cards (front full coverage and back 1/2 patch for magnetic stripe cards-50 cards)
- » Optional Custom Security Features

Note 2: For optimum laminator performance use Genuine Zebra Supplies.

Mechanical

- » Full metal enclosure with viewing window
- » Width: 32.75in (832mm)
- » Depth: 9.25in (235mm)
- » Height: 10.43in (265mm)
- » Weight: 47lbs (21.45kg)

Environmental

- » Operating Temperature: 60°F to 86°F (15°C to 30°C)
- » Operating Humidity: 20% to 65% non-condensing
- » Storage Temperature: -23°F to 158°F (-5°C to 70°C)
- » Storage Humidity: 20% to 70% non-condensing
- » Ventilation: Free air

Options

- » Built-in Ethernet
- » Smart card contact station (30 mil cards only)
- » Magnetic encoder
- » Cleaning supplies
- » Warranty programs
- » Service manual

www.zebracard.com

* Optimized for use with Zebra media



Zebra Technologies Corporation



An ISO 9001 registered company ©2004 ZIH Corp. Specifications listed are for base model printers with standard features only unless otherwise notes. Specifications subject to change without notice. All product and brand names are trademarks of their respective companies. All rights reserved. All Copyrights, Trade and Service Marks shown or depicted herein are registered by their owners. No infringement is made for or implied by the use thereof.

Part No. P520i-05/04

North America

Zebra Technologies Corporation
Card Imaging Division
1001 Flynn Road
Camarillo, CA 93012-8706
USA
Telephone: +1 805 579 1800
Fax: +1 805 579 1808
Toll free in US: 800 452 4056
e-mail: cards@zebra.com

Europe, Middle East, Africa

Zebra Technologies Corporation
Card Imaging Division
The Valley Centre, Gordon Road
High Wycombe
Buckinghamshire HP13 6EQ, UK
Telephone: +44 870 241 1527
Fax: +44 870 241 0765
e-mail: eurosales@zebra.com

Asia Pacific

Zebra Technologies Corporation
Card Imaging Division
16 New Industrial Road
#05-03 Hudson TechnoCentre
Singapore 536204
Telephone: +65 6858 0722
Fax: +65 6885 0836
e-mail: asiasales@zebra.com

Latin America

Zebra Technologies Corporation
Card Imaging Division
6175 NW 153rd St. #121
Miami Lakes, FL 33014
USA
Telephone: +1 305 558 3100
Fax: +1 305 558 8485
e-mail: latinsales@zebra.com