

EUROPOWER sealed lead-acid battery EC type

FOR CYCLE USE!

● Specification & Characteristics

Model		EC 65-12
Nominal voltage		12 [V]
Rated capacity		65 [Ah] / 20 [hr]
Dimensions	Container Height	174 [mm]
	Length	350 [mm]
	Width	166 [mm]
Weight		approx. 25 [kg]
Capacity 25 [°C]	20 [hr] 3,25 [A]	65,0 [Ah]
	10 [hr] 6,18 [A]	61,8 [Ah]
	5 [hr] 11,05 [A]	55,3 [Ah]
	30 [min] 65,0 [A]	32,5 [Ah]
Internal resistance		Approx. 6 [mΩ]
Max. Discharge current		650 [A] (5 [s])
Charging voltage 20 [°C]	Standby use	13,5 to 13,8 [V] (-20 [mV/°C])
	Cycle use	14,4 to 15 [V] (-30 [mV/°C])
Max. Charging current		19,5 [A]
Recommended charging current		6,5 [A]



EC 65-12

EUROPOWER batteries are made in AGM technology, constructed by plates, separators, safety valves and container. Since the electrolyte is held by a glass-mat separator and plates, batteries can use in any direction without leakage


EC types batteries have been designed for **cycle use** (repeated cycles of discharging/charging). They sustain for **50 % cycles more** than EP types batteries.

Typical applications of EC types batteries:

- measuring instruments,
- mobile and portable light sources,
- wheelchairs,
- solar powered systems,
- motor scooters, mowing machines, toys, robots, etc...

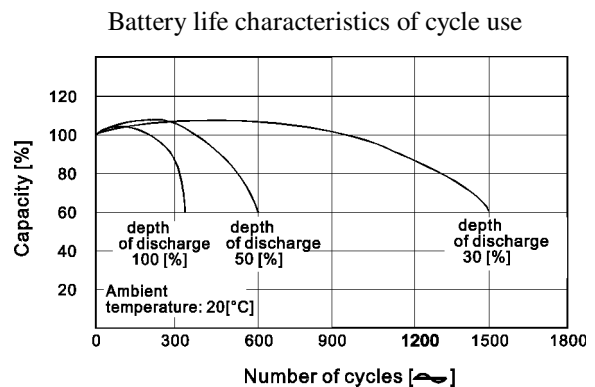
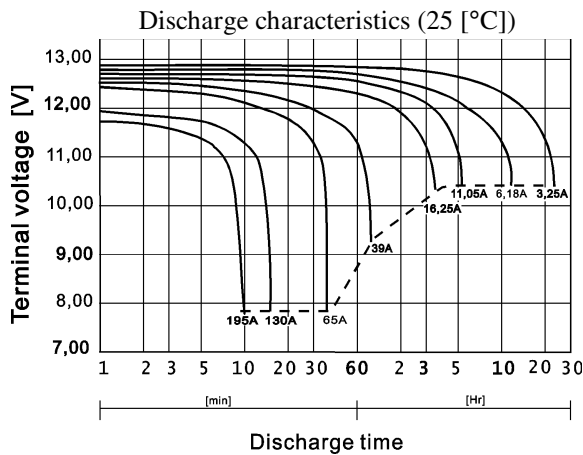


● Dimensions

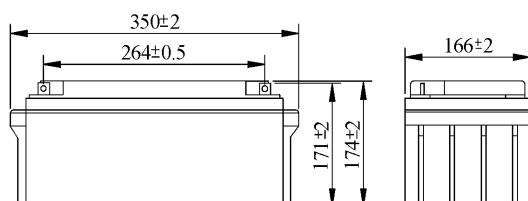

● Terminal type & position

• B2-2



Mark	Type	Date of issue	Change number	Date of change
EUROPOWER	EC 65-12	20.05.2003	0	-