

BP 65-12


◆ Physical Specification

● Nominal Voltage	: 12 [V]
● Nominal Capacity (20 h)	: 65 [Ah]
● Dimensions	
Total Height	: 173 [mm]
Container Height	: 153 [mm]
Length	: 350 [mm]
Width	: 166 [mm]
● Weight	: ~24 [kg]
● Container Material	: UL94HB ABS : UL94V-0 ABS
● Internal Resistance (25 [°C])	: ~5 [mΩ]
● Discharge Capacity under different Temperatures	
40 °C	: ~102%
25 °C	: ~100%
0 °C	: ~85%


◆ Electrical Specification

● Capacity 25 [°C]	
20 [h] @ 3.25 [A]	: 65 [Ah]
5 [h] @ 10.88 [A]	: 54.4 [Ah]
1 [h] @ 40.25 [A]	: 40.25 [Ah]
1 [C] @ 65 [A]	: 37.9 [Ah]
● Charging Voltage 25 [°C]	
Standby Use	: 13.65 [V] ± 0.15 [V]
Cycle Use	: 14.7 [V] ± 0.3 [V]
● Max Discharge Current	: 650 [A] (5 s.)
● Max Charging Current	: 19.5 [A]
● Self-Discharge Residual Capacity	
After 3 Months	: ~90%
After 6 Months	: ~82%
After 12 Months	: ~70%


◆ Dimensions [mm]

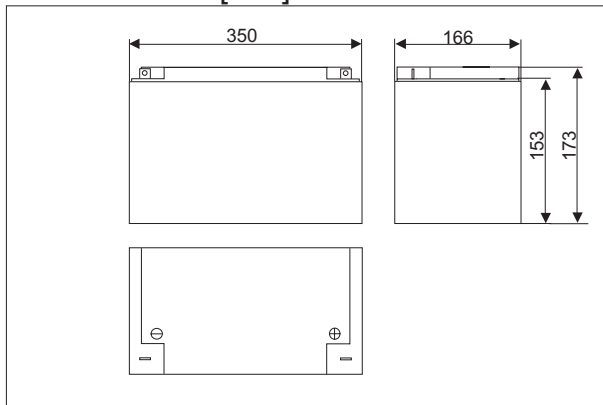


◆ Discharge Characteristics (25 [°C])

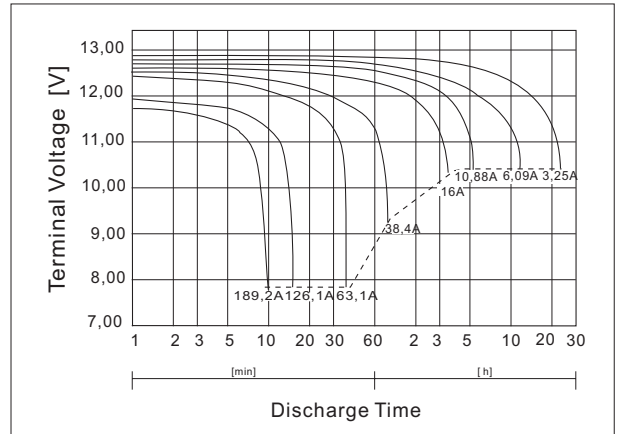

◆ Discharge Current & Discharge Duration Time

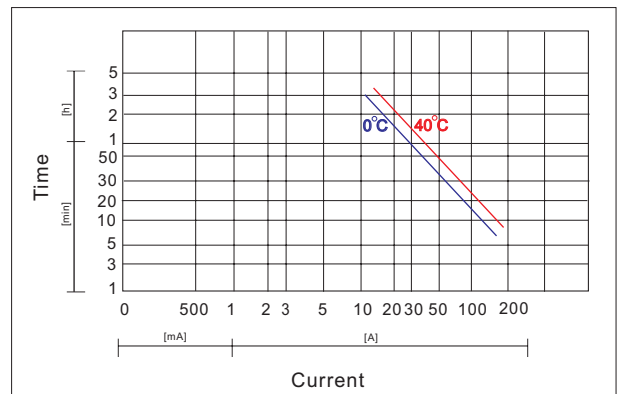

◆ Terminal [mm]

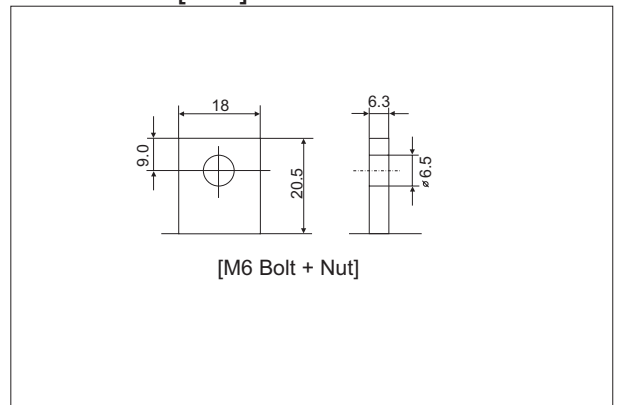

Mark	Type	Date of issue	Change number	Date of change
ALARMTEC	BP 65-12	24.01.2005	0	-